

**AT1040 50Ω 10W 1~30dB DC~42GHz**  
**2.92mm High Performance 50Ohm Stainless Steel Attenuator**



Ver A/0 Release Date March, 2018


P/N:AT1040

**Features**

- DC~42GHz Frequency Range
- Max Power 11W
- VSWR < 1.38 < 1.26 < 1.18 < 1.12  
C-Class B-Class A-Class S-Class

**Applications**

- Miniature Size
- 2.92mm Interfaces
- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

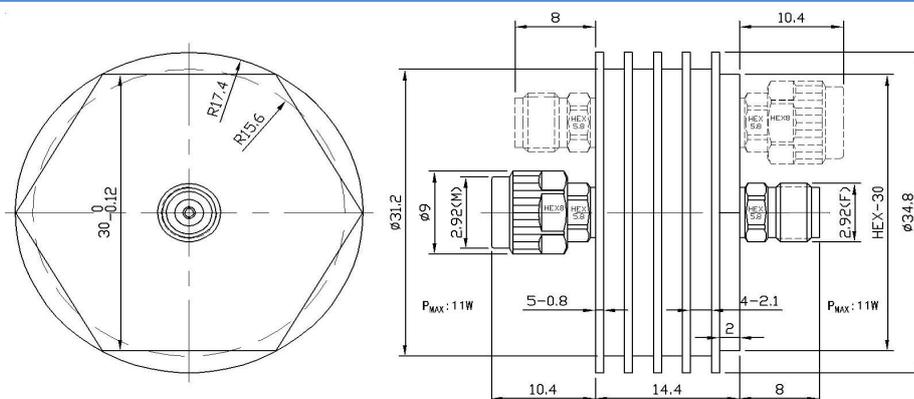

**Mechanical & Environmental Specifications**

Outer Conductor Coupling Nut	Passivated Stainless Steel	Temp. Range	Storage	-55°C~125°C
Radiator	Black Anodized Aluminum Heatsink	Working Temp.		-55°C~100°C
Inner Conductor Male	Beryllium Copper Gold plated (≥ 1.27μ m)	Altitude	Storage	< 15300 Meters
Female	Beryllium Copper Gold plated (≥ 1.27μ m)	Working Temp.		< 4800 Meters
Weight	38 g			

**Electrical Specifications**

Model	Frequency Range (GHz)	Attenuation(dBc) and accuracy				Return Loss(dB)
		1~3	4~8	9~25	26~40	
AT1040C-XX	DC~40GHz	-0.8/+1.2	-0.8/+1.2	-1.0/+1.0	-1.0/+1.2	-15.9
AT1040B-XX	DC~40GHz	-0.7/+1.0	-0.7/+1.0	-0.8/+0.8	-0.9/+1.0	-18.8
AT1040A-XX	DC~40GHz	-0.6/+0.9	-0.6/+0.9	-0.7/+0.7	-0.8/+0.8	-21.7
AT1040S-XX	DC~40GHz	-0.5/+0.8	-0.5/+0.8	-0.6/+0.6	-0.7/+0.7	-24.9

XX refers to decrease value, C, B, A, S are average power of performance level.

Average power: The ambient temperature corresponding to bidirectional 10W at input or output is 25 °C

When temperature is up to 100°C. The power decreases linearly to 1W

Peak power: Max power 200W (Maximum 5 μ s pulse width, maximum 3% duty cycle)

Working time: no air cooling, ≤ 5 minutes; with air cooling, air volume ≥ 5CFM, long-term work

**Remark**

- 1、 All physical dimensions are in mm and the tolerance is ± 1%
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Tell: +86 13480725660

Website: www.rfcoms.com

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice