

AT3040 50Ω 30W 10~40dB DC~42GHz
2.92mm High Performance 50Ohm Stainless Steel Attenuator



Ver A/0 Release Date March, 2018


P/N:AT3040

Features

- DC~42GHz Frequency Range
- Max Power 33W
- VSWR < 1.45 < 1.30 < 1.20 < 1.14
C-Class B-Class A-Class S-Class

Applications

- Miniature Size
- 2.92mm Interfaces
- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

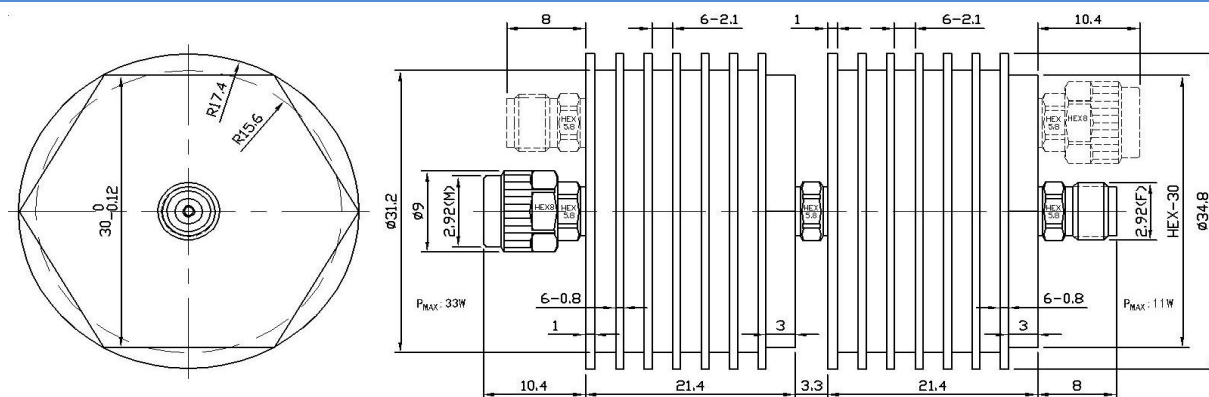

Mechanical & Environmental Specifications

Outer Conductor Coupling Nut	Passivated Stainless Steel	Temp. Range	Storage	-55℃~125℃
Radiator	Black Anodized Aluminum Heatsink	Working Temp.		-55℃~100℃
Inner Conductor Male	Beryllium Copper Gold plated(≥ 1.27μ m)	Altitude	Storage	< 15300 Meters
Female	Beryllium Copper Gold plated(≥ 1.27μ m)	Working Temp.		< 4800 Meters
Weight	100 g			

Electrical Specifications

Model	Frequency Range(GHz)	Attenuation(dBc) and accuracy				Return Loss(dB)
		10	20	30	40	
AT3040C-XX	DC~40GHz	-2.0/+2.5	-1.5/+2.0	-1.5/+2.0	-1.5/+2.0	-14.7
AT3040B-XX	DC~40GHz	-2.0/+2.2	-1.5/+1.8	-1.5/+1.8	-1.5/+1.8	-17.7
AT3040A-XX	DC~40GHz	-1.8/+2.2	-1.2/+1.8	-1.2/+1.8	-1.2/+1.8	-20.8
AT3040S-XX	DC~40GHz	-1.8/+2.0	-1.2/+1.5	-1.2/+1.5	-1.2/+1.5	-23.7

XX refers to decrease value,C,B,A,S are average power of performance level.Average power: the ambient temperature corresponding to 30W input or 10W output is 25℃.When temperature is up to 100℃.The power decreases linearly to 3W or 1W.
 Peak power: Max power 200W (Maximum 5 μ s pulse width, maximum 7% or 3% duty cycle)
 Working time: no air cooling, ≤ 5 minutes; with air cooling, air volume ≥ 15CFM, long-term work

Remark

- 1、 All physical dimensions are in mm and the tolerance is ± 1%
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Tell: +86 13480725660

Website: www.rfcoms.com

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice