

**AT6040 50Ω 60W 30~40dB DC~42GHz**  
**2.92mm High Performance 50Ohm Stainless Steel Attenuator**



Ver A/0 Release Date March, 2018


P/N:AT6040

**Features**

- DC~42GHz Frequency Range
- Max Power 50W
- VSWR < 1.58 < 1.38 < 1.26 < 1.18  
C-Class B-Class A-Class S-Class

**Applications**

- Miniature Size
- 2.92mm Interfaces
- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

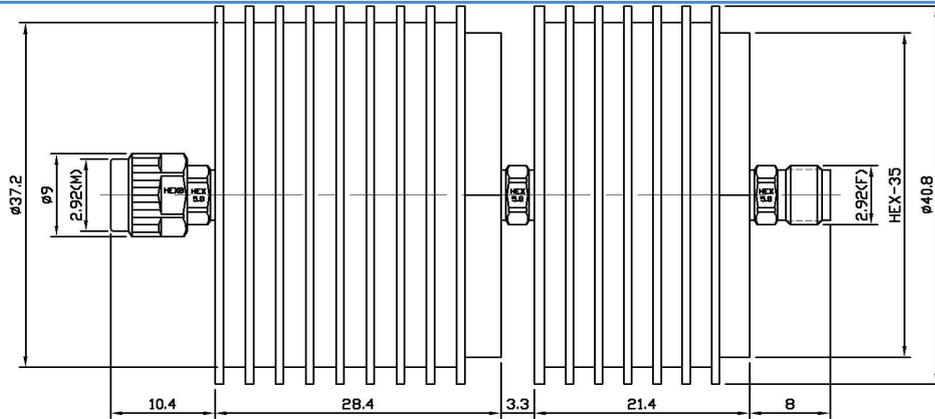

**Mechanical & Environmental Specifications**

Outer Conductor Coupling Nut	Passivated Stainless Steel or ZTP	Temp. Range	Storage	-55°C~125°C
Radiator	Black Anodized Aluminum Heatsink	Working Temp.		-55°C~100°C
Inner Conductor Male	Beryllium Copper Gold plated ( $\geq 1.27\mu\text{m}$ )	Altitude	Storage	< 15300 Meters
Female	Beryllium Copper Gold plated ( $\geq 1.27\mu\text{m}$ )	Working Temp.		< 4800 Meters
Weight	300 g			

**Electrical Specifications**

Model	Frequency Range (GHz)	Attenuation(dBc) and accuracy		Return Loss(dB)
		30	40	
AT6040C-XX	DC~40GHz	-2.0/+3.0	-2.0/+3.0	-13.0
AT6040B-XX	DC~40GHz	-1.8/+2.5	-1.8/+2.5	-15.9
AT6040A-XX	DC~40GHz	-1.5/+2.0	-1.5/+2.0	-18.8
AT6040S-XX	DC~40GHz	-1.2/+2.0	-1.2/+2.0	-21.7

XX refers to decrease value, C, B, A, S are average power of performance level. Average power: the ambient temperature corresponding to 60W input or 10W output is 25°C. When temperature is up to 100°C. The power decreases linearly to 10W or 2W. Peak power: Max power 500W (Maximum 5 μs pulse width, maximum 8% duty cycle) Working time: no air cooling, ≤ 10 minutes; with air cooling, air volume ≥ 30CFM, long-term work

**Remark**

- 1、 All physical dimensions are in mm and the tolerance is ± 1%
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Tell: +86 13480725660

Website: www.rfcoms.com

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice