

产品特点

- DC~40GHz 使用频率范围
- 低驻波比

应用场景


- 通用测试
- 精密测量

产品规格


- 特殊阻抗: 50ohm
- 工作频率: DC~40GHz
- 耐用性: 500 次
- 温度范围: -55℃~+165℃

材料/表面处理


- 主体: 不锈钢SU303 抛光钝化
- 中心导体: 铍青铜 镀金(MIL-G-45204)
- 绝缘体: PEI
- 符合MIL-STD-348A的2.92mm界面尺寸

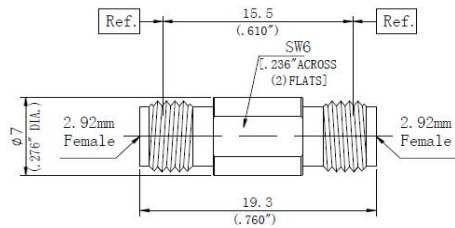


描述:	2.92mm母转2.92mm母
PN:	AD00400202
驻波:	DC-40GHz...1.20:1(max)

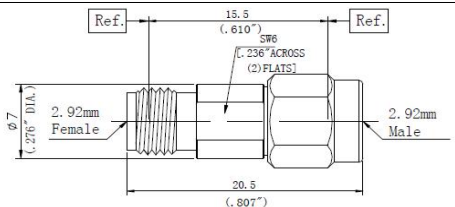


描述:	2.92mm公转2.92mm母
PN:	AD00400102
驻波:	DC-40GHz...1.15:1(max)

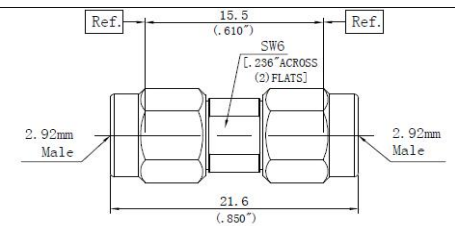


描述:	2.92mm公转2.92mm母
PN:	AD00400101
驻波:	DC-40GHz...1.15:1(max)

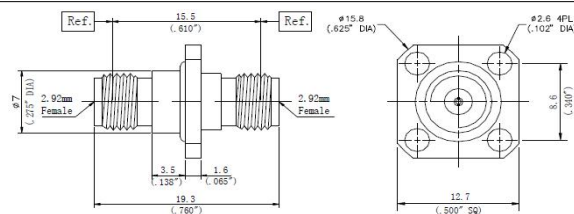


描述:	2.92mm公转2.92mm母
PN:	AD00400202F
驻波:	DC-40GHz...1.20:1(max)

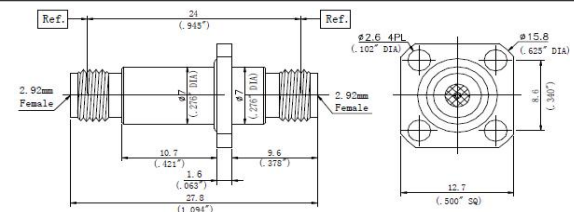

描述:	2.92mm公转2.92mm母
PN:	AD00400202FL
驻波:	DC-40GHz...1.20:1(max)

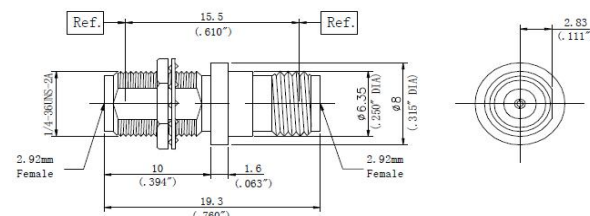

描述:	2.92mm公转2.92mm母
PN:	AD00400202Y
驻波:	DC-40GHz...1.20:1(max)

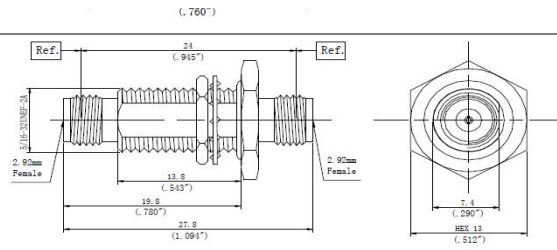

描述:	2.92mm公转2.92mm母
PN:	AD00400202Y2
驻波:	DC-40GHz...1.20:1(max)

备注:

- 1、所有物理尺寸单位 mm, 尺寸公差 $\pm 1\%$ 。
- 2、网络分析仪在整个频段内进行测试, 100%电性能测试。
- 3、可按照客户要求订制特殊连接器和特殊衰减量。

深圳市睿凡讯连科技有限公司

网址: www.rfcoms.com

电话: +86 13480725660

Email: luke@rfcoms.com

本技术资料产权归属于深圳睿凡公司, 未经允许, 不得复制、摘抄或转交的其他第三方公司与机构。规格如有更改, 恕不另行通知

AD0040 50Ω DC~40GHz
2.92mm High Performance 50ohm In Series Stainless Steel Adapter



Ver A/0 Release Date March, 2018 P/N:AD0040

Features

- DC~40GHz Frequency Range
- Low VSWR

Applications


- General purpose test
- Precision measurements

Specifications


- Impedance: 50ohm
- Frequency: DC~40GHz
- Durability: 500 cycles
- Temp. Range: -55°C~+165°C

Material/Finishing


- Housing: Stainless Steel SU303
- Center contact: Beryllium Copper
- Insulators: PEI
- 2.92mm Interfaces PER MIL-STD-348A
- Polished/Passivated
- Gold plated (MIL-G-45204)

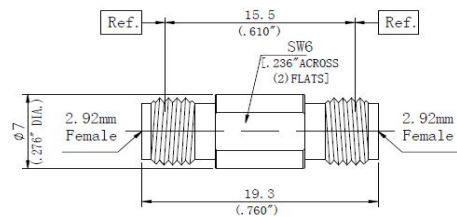


Description:	2.92mm(f) to 2.92mm(f)
PN:	AD00400202
VSWR:	DC-40GHz ... 1.20:1 (max)

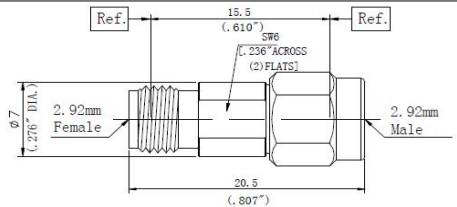


Description:	2.92mm(m) to 2.92mm(f)
PN:	AD00400102
VSWR:	DC-40GHz ... 1.15:1 (max)

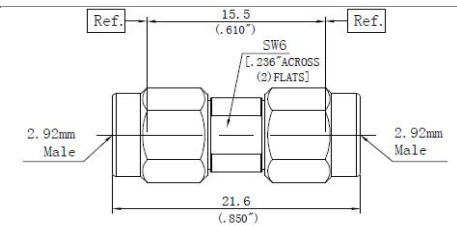


Description:	2.92mm(m) to 2.92mm(m)
PN:	AD00400101
VSWR:	DC-40GHz ... 1.15:1 (max)

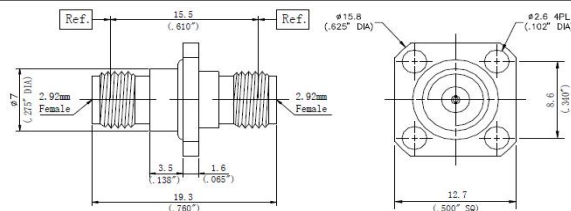


Description:	2.92mm(f) to 2.92mm(f)
PN:	AD00400202F
VSWR:	DC-40GHz ... 1.20:1 (max)

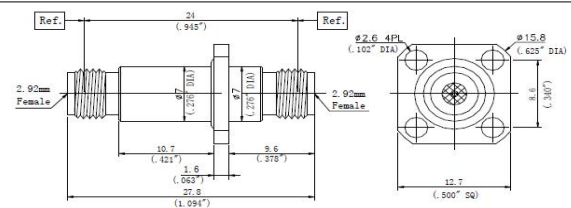


Description:	2.92mm(f) to 2.92mm(f)
PN:	AD00400202FL
VSWR:	DC-40GHz ... 1.20:1 (max)

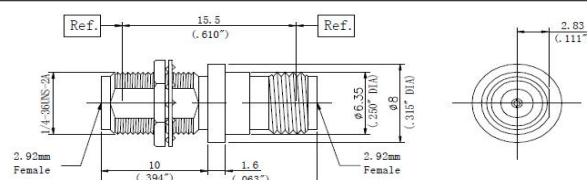

Description:	2.92mm(f) to 2.92mm(f)
PN:	AD00400202Y



VSWR:	DC-40GHz...1.20:1(max)
-------	------------------------

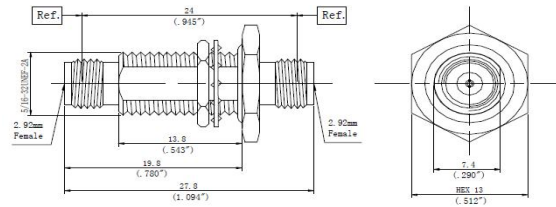

Description:	2.92mm(f) to 2.92mm(f)
PN:	AD00400202Y2
VSWR:	DC-40GHz...1.20:1(max)

Shenzhen RFcoms Technology Co.,LTD

Tell: +86 13480725660

Website: www.rfcoms.com

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice