

产品特点

- DC~33GHz 使用频率范围
- 低驻波比

应用场景


- 通用测试
- 精密测量

产品规格


- 特殊阻抗: 50ohm
- 工作频率: DC~33GHz
- 耐用性: 500 次
- 温度范围: -55℃~+165℃

材料/表面处理


- 主体: 不锈钢SU303 抛光钝化
- 中心导体: 镀青铜 镀金(MIL-G-45204)
- 绝缘体: PEI
- 符合PER IEEE STD 287-2007中的2.4mm界面尺寸
- 符合3.5mm Interfaces PER IEC-60169界面尺寸

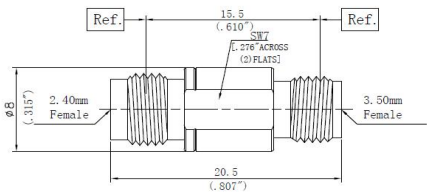


| | |
|-----|------------------------|
| 描述: | 3.5mm母转2.4mm母 |
| PN: | AD33500202 |
| 驻波: | DC-33GHz...1.15:1(max) |

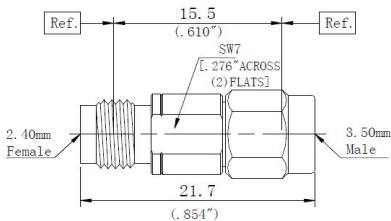

| | |
|-----|------------------------|
| 描述: | 3.5mm公转2.4mm母 |
| PN: | AD33500102 |
| 驻波: | DC-33GHz...1.15:1(max) |

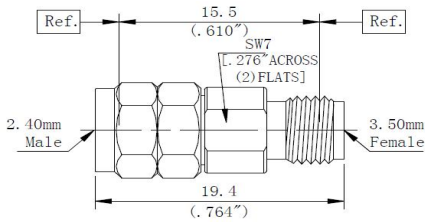

| | |
|-----|------------------------|
| 描述: | 3.5mm母转2.4mm公 |
| PN: | AD33500201 |
| 驻波: | DC-33GHz...1.15:1(max) |

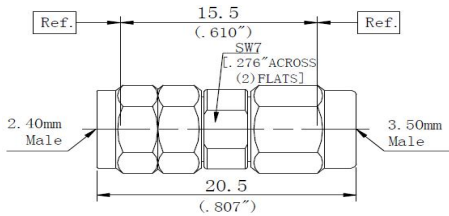

| | |
|-----|------------------------|
| 描述: | 3.5mm公转2.4mm公 |
| PN: | AD33500101 |
| 驻波: | DC-33GHz...1.15:1(max) |

备注:

- 1、所有物理尺寸单位 mm, 尺寸公差±1%。
- 2、网络分析仪在整个频段内进行测试, 100%电性能测试。
- 3、可按照客户要求订制特殊连接器和特殊衰减量。

AD3350 50Ω DC~33GHz
2.4mm-3.5mm High Performance 50ohm Between Series Stainless Steel Adapter



Ver A/0 Release Date March, 2018 P/N:AD3350

Features

- DC~33GHz Frequency Range
- Low VSWR

Applications



- General purpose test
- Precision measurements

Specifications


- Impedance: 50ohm
- Frequency: DC~33GHz
- Durability: 500 cycles
- Temp. Range: -55°C~+165°C

Material/Finishing


- Housing: Stainless Steel SU303
- Center contact: Beryllium Copper
- Insulators: PEI
- Polished/Passivated
- Gold plated (MIL-G-45204)
- 2.4mm interfaces PER IEEE STD 287-2007 3.5mm Interfaces PER IEC-60169

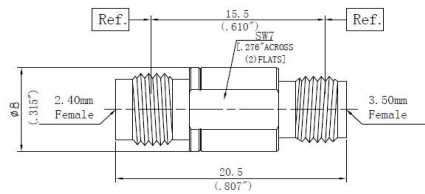



| | |
|--------------|---------------------------|
| Description: | 3.5mm(f) to 2.4mm(f) |
| PN: | AD33500202 |
| VSWR: | DC-33GHz ... 1.15:1 (max) |

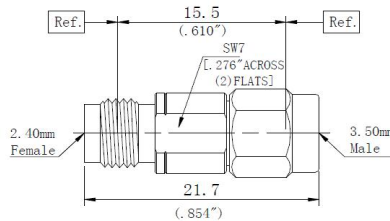

| | |
|--------------|---------------------------|
| Description: | 3.5mm(m) to 2.4mm(f) |
| PN: | AD33500102 |
| VSWR: | DC-33GHz ... 1.15:1 (max) |

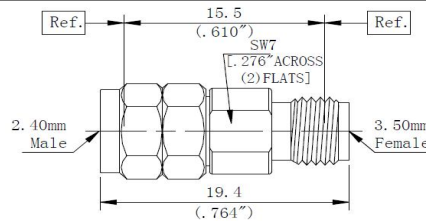

| | |
|--------------|---------------------------|
| Description: | 3.5mm(f) to 2.4mm(m) |
| PN: | AD33500201 |
| VSWR: | DC-33GHz ... 1.15:1 (max) |

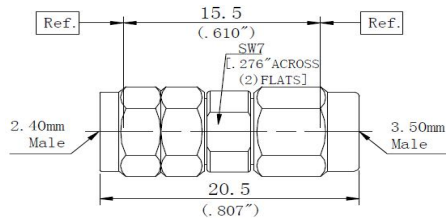

| | |
|--------------|---------------------------|
| Description: | 3.5mm(m) to 2.4mm(m) |
| PN: | AD33500101 |
| VSWR: | DC-33GHz ... 1.15:1 (max) |

Remark

- 1、 All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Website: www.rfcoms.com

Tell: +86 13480725660

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice