


应用场景


- 通用测试
- 精密工作台测量
- 测试端口
- 组件定制

材料/表面处理


- 主体: 不锈钢U303 抛光钝化
- 中心导体: 铍青铜 镀金(MIL-G-45204)
- 绝缘体: PTFE&PEI



描述:	N 母头法兰接RG402 SS402线缆,直焊式
PN:	400CC001802F
驻波:	DC-18GHz ...1.25:1(max)



描述:	N 母头螺母接RG405 SS405线缆,直焊式
PN:	280CC001802YA
驻波:	DC-18GHz...1.25:1(max)

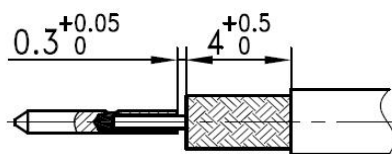

描述:	N 母头螺母接RG405 SS405线缆,直焊式
PN:	280CC001802Y
驻波:	DC-18GHz...1.25:1(max)

- 1、所有物理尺寸单位 mm, 尺寸公差 $\pm 1\%$ 。
- 2、网络分析仪在整个频段内进行测试, 100%电性能测试。
- 3、可按照客户要求订制特殊连接器和特殊衰减量。

电话: +86 13480725660
Email: luke@rfcoms.com

本技术资料产权归属于深圳睿凡公司，未经允许，不得复制、摘抄或转交的其他第三方公司与机构。规格如有更改，恕不另行通知

N 50Ω DC~18GHz
N High Performance 50ohm Connector For Cable



Ver A/0 Release Date March, 2019 P/N:CC0018

Features

- DC~18GHz Frequency Range
- Low VSWR

Applications




- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

Specifications




- Impedance: 50ohm
- Frequency: DC~18GHz
- Durability: 500 cycles
- Temp. Range: -55℃~+165℃

Material/Finishing



- Housing: Stainless Steel SU303
- Center contact: Beryllium Copper
- Insulators: PTFE&PEI
- Polished/Passivated
- Gold plated (MIL-G-45204)



Description:	N female flange for RG402 SS402
PN:	400CC001802F
VSWR:	DC-18GHz ... 1.25:1 (max)



Description:	N female B/H for RG405 SS405
PN:	280CC001802YA
VSWR:	DC-18GHz ... 1.25:1 (max)

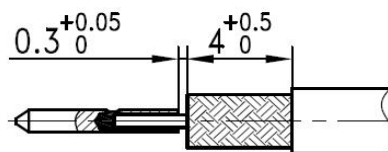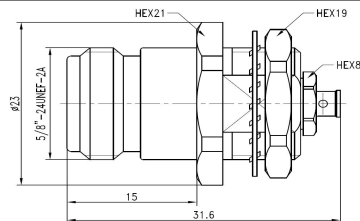

Description:	N female B/H for RG405 SS405
PN:	280CC001802Y
VSWR:	DC-18GHz ... 1.25:1 (max)

Remark

- 1、 All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Website: www.rfcoms.com

Tell: +86 13480725660

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice