

产品特点

- DC~18GHz 使用频率范围
- 低驻波比

应用场景



- 通用测试
- 精密工作台测量
- 测试端口
- 组件定制

产品规格



- 特殊阻抗: 50ohm
- 工作频率: DC~18GHz
- 耐用性: 500 次
- 温度范围: -55℃~+165℃

材料/表面处理



- 主体: 不锈钢SU303 抛光钝化
- 中心导体: 镀青铜 镀金(MIL-G-45204)
- 绝缘体: PTFE&PEI

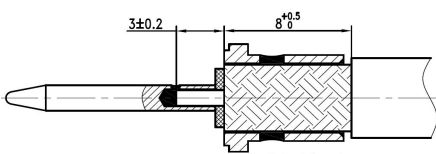



| | |
|-----|----------------------------|
| 描述: | N 公头接UFB205A, HF190线缆, 装接式 |
| PN: | 520CC001801 |
| 驻波: | DC-18GHz ... 1.25:1 (max) |

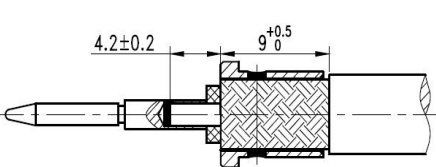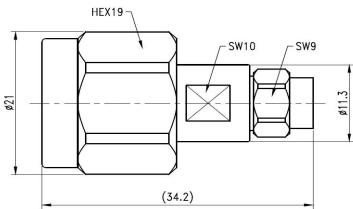

| | |
|-----|---------------------------|
| 描述: | N 公头接550线缆, 装接式 |
| PN: | 550CC001801 |
| 驻波: | DC-18GHz ... 1.25:1 (max) |

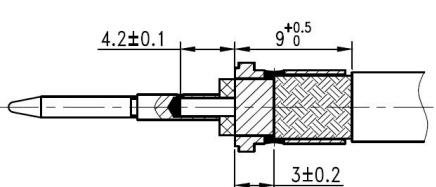

| | |
|-----|---------------------------|
| 描述: | N 公头接550线缆, 装接式 |
| PN: | 550CC001801AG |
| 驻波: | DC-18GHz ... 1.25:1 (max) |

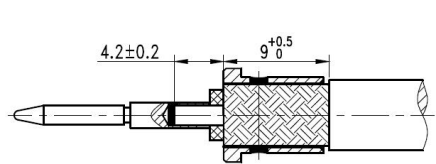

| | |
|-----|---------------------------|
| 描述: | N 公头接550线缆, 装接式 |
| PN: | 550CC001801BG |
| 驻波: | DC-18GHz ... 1.25:1 (max) |

备注:

- 1、所有物理尺寸单位 mm, 尺寸公差 ±1%。
- 2、网络分析仪在整个频段内进行测试, 100%电性能测试。
- 3、可按照客户要求订制特殊连接器和特殊衰减量。

N 50Ω DC~18GHz
N High Performance 50ohm Connector For Cable



Ver A/0 Release Date March, 2019 P/N:CC0018

Features

- DC~18GHz Frequency Range
- Low VSWR

Applications



- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

Specifications



- Impedance: 50ohm
- Frequency: DC~18GHz
- Durability: 500 cycles
- Temp. Range: -55℃~+165℃

Material/Finishing



- Housing: Stainless Steel SU303
- Center contact: Beryllium Copper
- Insulators: PTFE&PEI
- Polished/Passivated
- Gold plated(MIL-G-45204)

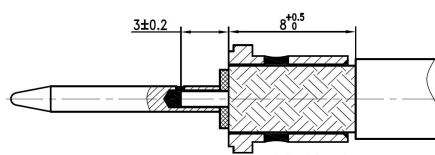



| | |
|--------------|---------------------------------|
| Description: | N male for UFB205A, HF190 cable |
| PN: | 520CC001801 |
| VSWR: | DC-18GHz . . . 1.25:1 (max) |

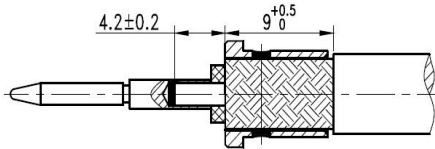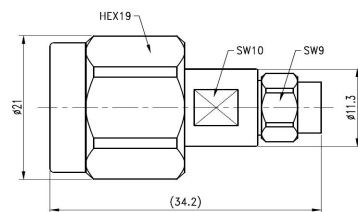

| | |
|--------------|-----------------------------|
| Description: | N male for 550 cable |
| PN: | 550CC001801 |
| VSWR: | DC-18GHz . . . 1.25:1 (max) |

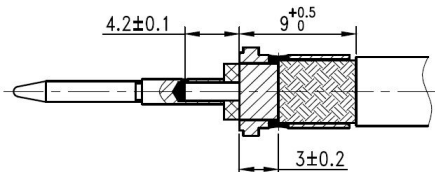

| | |
|--------------|-----------------------------|
| Description: | N male for 550 cable |
| PN: | 550CC001801AG |
| VSWR: | DC-18GHz . . . 1.25:1 (max) |

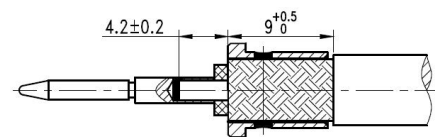

| | |
|--------------|-----------------------------|
| Description: | N male for 550 cable |
| PN: | 550CC001801BG |
| VSWR: | DC-18GHz . . . 1.25:1 (max) |

Remark

- 1、 All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD
 Website: www.rfcoms.com

Tell: +86 13480725660
 Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice