

SMA 50Ω DC~27GHz
SMA High Performance 50ohm Connector For Cable



Ver A/0 Release Date March, 2019 P/N:CC0027

Features

- DC~27GHz Frequency Range
- Low VSWR

Applications



- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

Specifications



- Impedance: 50ohm
- Frequency: DC~27GHz
- Durability: 500 cycles
- Temp. Range: -55℃~+165℃

Material/Finishing

- Housing: Stainless Steel SU303
- Center contact: Beryllium Copper
- Insulators: PEI&PTFE
- Polished/Passivated
- Gold plated (MIL-G-45204)

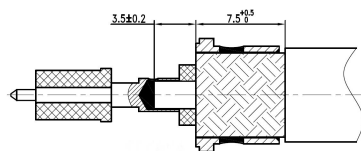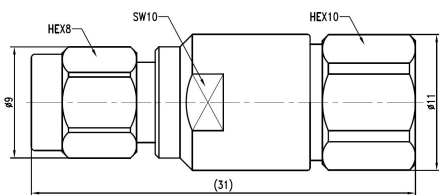

Description:	SMA male for CNX3508 cable
PN:	810CC002701
VSWR:	DC-18GHz ... 1.25:1 (max)

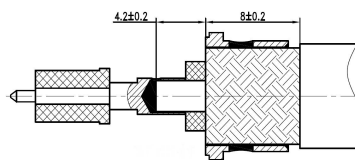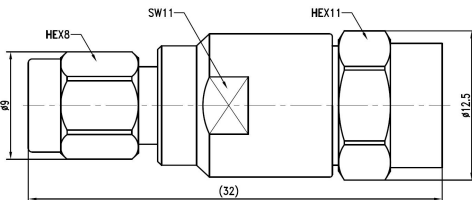

Description:	SMA male for RFSE830 cable
PN:	830CC002701
VSWR:	DC-18GHz ... 1.25:1 (max)

Remark

- 1、All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Website: www.rfcoms.com

Tell: +86 13480725660

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice