


- ## 应用场景

- 通用测试
- 精密工作台测量
- 测试端口
- 组件定制


产品规格

- 材料/表面处理


- 主体: 铍青铜 镀金
- 中心导体: 铍青铜 镀金
- 绝缘体: PEI&PTFE




描述:	SMP 母头接3506线缆, 装接式
PN:	220CC0040SM02
驻波:	DC-40GHz...1.38:1(max)



描述:	SMP 母头法兰接3506线缆, 装接式
PN:	220CC0040SM02F
驻波:	DC-40GHz...1.38:1(max)

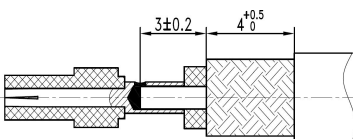

描述:	SMP 母头接3507线缆,直焊式
PN:	360CC0040SM02
驻波:	DC-40GHz...1.38:1(max)

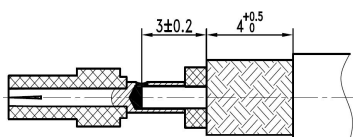

描述:	SMP 母头弯头接 SS405线缆,直焊式
PN:	360CC0040SM02F
驻波:	DC-40GHz...1.38:1(max)

本技术资料产权归属于深圳睿凡公司，未经允许，不得复制、摘抄或转交的其他第三方公司与机构。规格如有更改，恕不另行通知

SMP 50Ω DC~40GHz
SMP High Performance 50ohm Connector For Cable



Ver A/0 Release Date March, 2019 P/N:CC0040SM

Features

- DC~40GHz Frequency Range
- Low VSWR

Applications



- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

Specifications



- Impedance: 50ohm
- Frequency: DC~40GHz
- Durability: 500 cycles
- Temp. Range: -55°C~+165°C

Material/Finishing



- Housing: Beryllium Copper
- Center contact: Beryllium Copper
- Insulators: PEI&PTFE
- Gold plated
- Gold plated

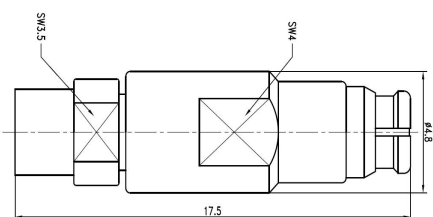



Description:	SMP female for 3506 cable
PN:	220CC0040SM02
VSWR:	DC-40GHz ... 1.38:1 (max)

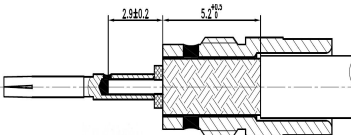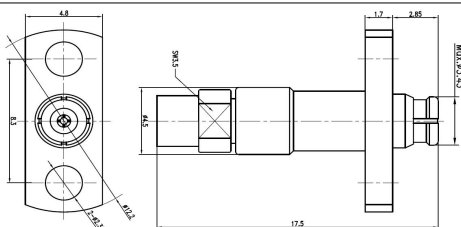

Description:	SMP female flange for 3506 cable
PN:	220CC0040SM02F
VSWR:	DC-40GHz ... 1.38:1 (max)

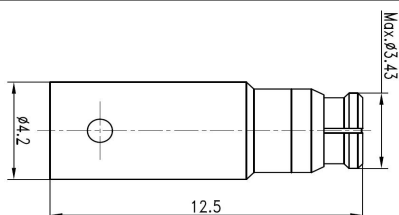

Description:	SMP female for 3507 cable
PN:	360CC0040SM02
VSWR:	DC-40GHz ... 1.38:1 (max)

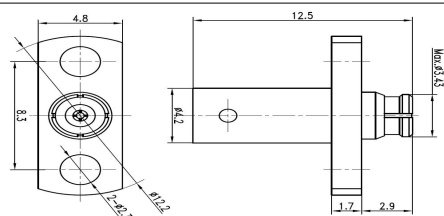

Description:	SMP female flange for 3507 cable
PN:	360CC0040SM02F
VSWR:	DC-40GHz ... 1.38:1 (max)

Remark

- 1、All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Website: www.rfcoms.com

Tell: +86 13480725660

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice