


- ## 应用场景


- 通用测试
- 精密工作台测量
- 测试端口
- 组件定制

## 材料/表面处理


- 主体: 不锈钢SU303/黄铜
- 中心导体: 镀青铜
- 绝缘体: PEI&PTFE




描述:	SSMA 母头法兰接RG047线缆,焊接式
PN:	047CC0027SSM02FAG
驻波:	DC-26.5GHz ...1.25:1(max)

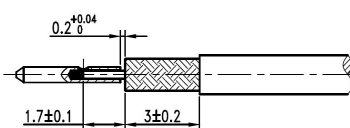

描述:	SSMA 母头法兰接RG047线缆,焊接式
PN:	047CC0027SSM02FG
驻波:	DC-26.5GHz ...1.25:1(max)

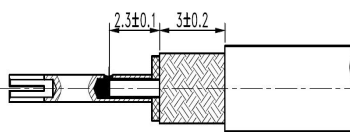

描述:	SSMA 母头法兰接RG405线缆,焊接式
PN:	405CC0027SSM02FB
驻波:	DC-26.5GHz ...1.25:1(max)

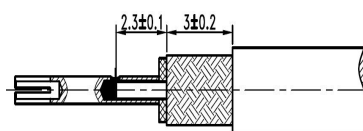

描述:	SSMA 母头法兰接RG405线缆,焊接式
PN:	405CC0027SSM02FBA
驻波:	DC-26.5GHz ...1.25:1(max)

本技术资料产权归属于深圳睿凡公司，未经允许，不得复制、摘抄或转交的其他第三方公司与机构。规格如有更改，恕不另行通知

**SSMA 50Ω DC~27GHz**  
**SMA High Performance 50ohm Connector For Cable**



Ver A/0 Release Date March, 2019 P/N:CC0027SSM

**Features**

- DC~27GHz Frequency Range
- Low VSWR

**Applications**



- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

**Specifications**



- Impedance: 50ohm
- Frequency: DC~27GHz
- Durability: 500 cycles
- Temp. Range: -55℃~+165℃

**Material/Finishing**



- Housing: Stainless Steel SU303/Brass
- Center contact: Beryllium Copper
- Insulators: PEI&PTFE
- Polished/Passivated/ Gold Plated
- Gold plated (MIL-G-45204)

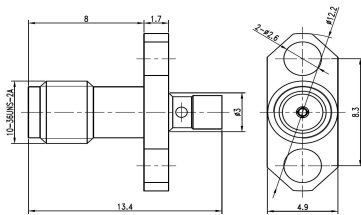



Description:	SSMA female flange for RG047
PN:	047CC0027SSM02FAG
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

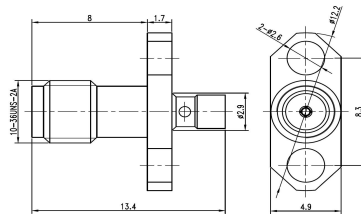

Description:	SSMA female flange for RG047
PN:	047CC0027SSM02FG
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

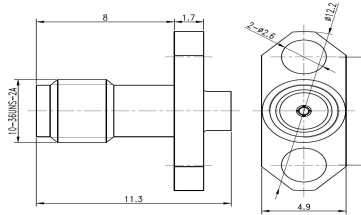

Description:	SSMA female flange for RG405
PN:	405CC0027SSM02FB
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

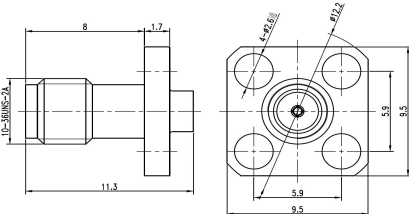

Description:	SSMA female flange for RG405
PN:	405CC0027SSM02FBA
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

**Remark**

- 1、All physical dimensions are in mm and the tolerance is  $\pm 1\%$
- 2、The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Website: www.rfcoms.com

Tell: +86 13480725660

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice