


应用场景


- 通用测试
- 精密工作台测量
- 测试端口
- 组件定制

材料/表面处理


- 主体: 不锈钢SU303/黄铜
- 中心导体: 镀青铜
- 绝缘体: PEI&PTFE

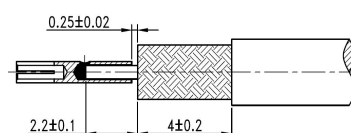

描述:	SSMA 母头接RG405线缆,焊接式
PN:	405CC0027SSM02B
驻波:	DC-26.5GHz ...1.25:1(max)

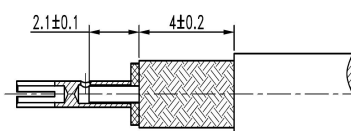

描述:	SSMA 母头接RG405线缆,焊接式
PN:	405CC0027SSM02BA
驻波:	DC-26.5GHz ...1.25:1(max)

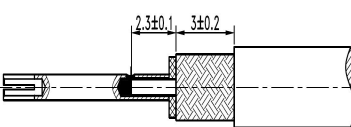

描述:	SSMA 母头接RG405线缆,焊接式
PN:	405CC0027SSM02YB
驻波:	DC-26.5GHz ...1.25:1(max)

- 1、所有物理尺寸单位 mm, 尺寸公差 $\pm 1\%$ 。
- 2、网络分析仪在整个频段内进行测试, 100%电性能测试。
- 3、可按照客户要求订制特殊连接器和特殊衰减量。

电话: +86 13480725660
Email: luke@rfcoms.com

本技术资料产权归属于深圳睿凡公司，未经允许，不得复制、摘抄或转交的其他第三方公司与机构。规格如有更改，恕不另行通知

Features

- ## Applications


- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

Specifications


- Impedance: 50ohm
- Frequency: DC~27GHz
- Durability: 500 cycles
- Temp. Range: -55℃~+165℃

Material/Finishing


- Housing: Stainless Steel SU303/Brass
- Polished/Passivated/Gold Plated
- Center contact:Beryllium Copper
- Gold plated(MIL-G-45204)
- Insulators:PEI&PTFE

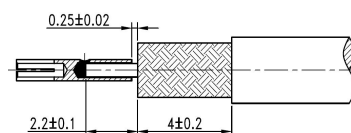

Description:	SSMA female for RG405 cable
PN:	405CC0027SSM02B
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

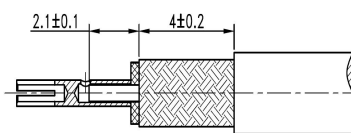

Description:	SSMA female for RG405 cable
PN:	405CC0027SSM02BA
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

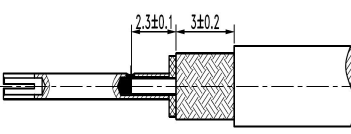

Description:	SSMA female BH for RG405 cable
PN:	405CC0027SSM02YB
VSWR:	DC-26.5GHz . . . 1.25:1 (max)

Remark

- 1、All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Tell: +86 13480725660

Website: www.rfcoms.com

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice