

AT10018 50Ω 100W 9~30dB DC~18GHz
SMA High Performance 50Ohm Stainless Steel Attenuator



Ver A/0 Release Date March 2018


P/N:AT10018

Features

- DC~18GHz Frequency Range
- Max Power 100W
- VSWR < 1.20

Applications

- Miniature Size
- N Interfaces
- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

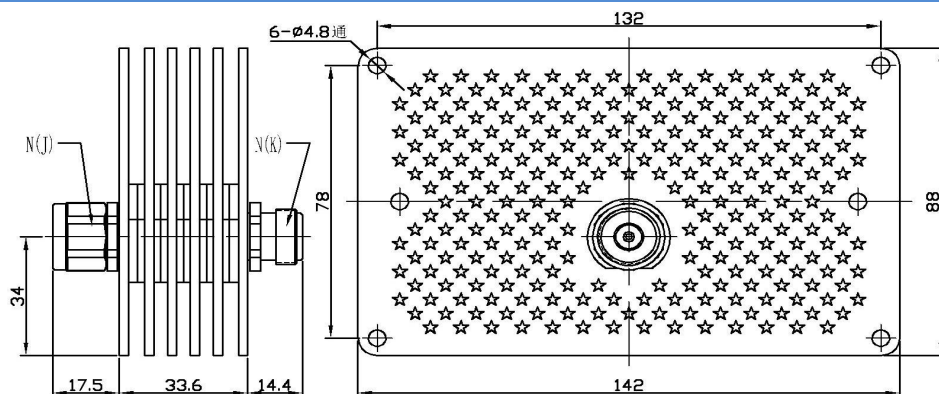

Mechanical & Environmental Specifications

Outer Conductor Coupling Nut	Passivated Stainless Steel	Temp. Range	Storage	-55℃~125℃
Radiator	Passivated Stainless Steel	Working Temp.		-55℃~100℃
Inner Conductor Male	Beryllium Copper Gold plated($\geq 1.27\mu\text{m}$)	Altitude	Storage	< 15300 Meters
Female	Beryllium Copper Gold plated($\geq 1.27\mu\text{m}$)	Working Temp.		< 4800 Meters
Weight	580 g			

Electrical Specifications

Model	Frequency Range(GHz)	Attenuation(dBc) and accuracy				Return Loss(dB)
		9	10	20	30	
AT10018-XX	DC~18GHz	-0.5/+0.5	-0.5/+0.5	-0.5/+0.5	-0.6/+0.6	-24.7

XX refers to decrease value. Temperature coefficient 0.0002dB/dB/℃.

Power sensitivity: 0.001dB/dB/W. Average power: the ambient temperature corresponding to maximum 60W power is 25℃.

When temperature is up to 100℃. The power decreases linearly to 6W

Peak power: Max power 1000W (Maximum 5 μs pulse width, maximum 5% duty cycle)

Remark

- 1、 All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Tell: +86 13480725660

Website: www.rfcoms.com

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice