

产品特点

- DC~40GHz 使用频率范围
- 低驻波比

应用场景



- 通用测试
- 精密工作台测量
- 测试端口
- 组件定制

产品规格



- 特殊阻抗: 50ohm
- 工作频率: DC~40GHz
- 耐用性: 500 次
- 温度范围: -55℃~+165℃

材料/表面处理



- 主体: 不锈钢SU303 抛光钝化
- 中心导体: 镀青铜 镀金(MIL-G-45204)
- 绝缘体: PEI

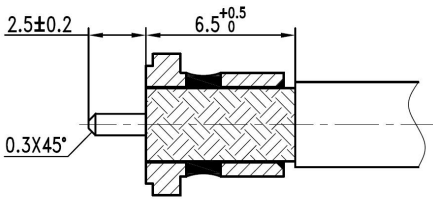

描述:	2.92mm 公弯头接3507线缆, 装接式
PN:	360CC004001LGA
驻波:	DC-40GHz...1.35:1(max)

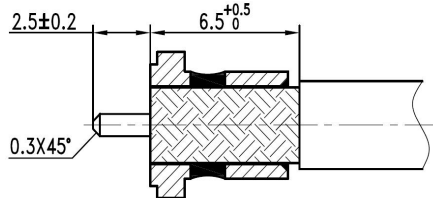

描述:	2.92mm 公弯头接3507线缆, 装接式
PN:	360CC004001LG
驻波:	DC-40GHz...1.35:1(max)

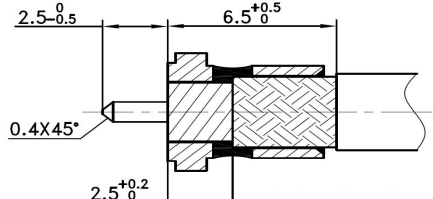

描述:	2.92mm 公弯头接SS402线缆,装接式
PN:	400CC004001L
驻波:	DC-40GHz...1.35:1(max)

备注:

- 1、所有物理尺寸单位 mm, 尺寸公差±1%。
- 2、网络分析仪在整个频段内进行测试, 100%电性能测试。
- 3、可按照客户要求订制特殊连接器和特殊衰减量。

深圳市睿凡讯连科技有限公司
网址: www.rfcoms.com

电话: +86 13480725660
Email: luke@rfcoms.com

本技术资料产权归属于深圳睿凡公司, 未经允许, 不得复制、摘抄或转交的其他第三方公司与机构。规格如有更改, 恕不另行通知

2.92mm 50Ω DC~40GHz
2.92mm High Performance 50ohm Connector For Cable



Ver A/0 Release Date March, 2019 P/N:CC0040

Features

- DC~40GHz Frequency Range
- Low VSWR

Applications



- General purpose test
- Precise Bench-top Testing
- Vector Network Analyzer Test Port
- Custom Cable Assembly

Specifications



- Impedance: 50ohm
- Frequency: DC~40GHz
- Durability: 500 cycles
- Temp. Range: -55℃~+165℃

Material/Finishing



- Housing: Stainless Steel SU303
- Center contact: Beryllium Copper
- Insulators: PEI
- Polished/Passivated
- Gold plated (MIL-G-45204)

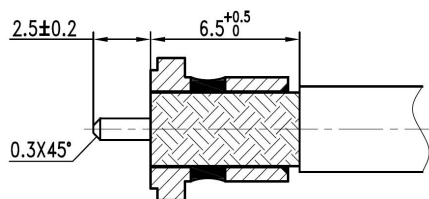

Description:	2.92mm male R/A for 3507 cable
PN:	360CC004001LGA
VSWR:	DC-40GHz . . . 1.35:1 (max)

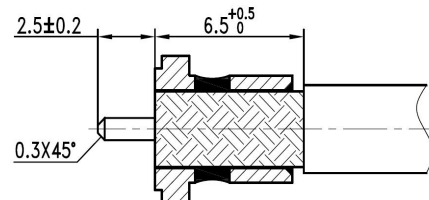

Description:	2.92mm male R/A for 3507 cable
PN:	360CC004001LG
VSWR:	DC-40GHz . . . 1.35:1 (max)

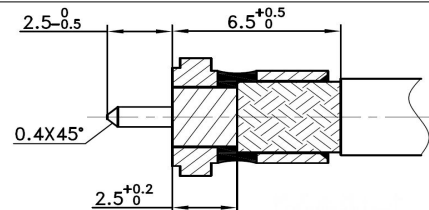

Description:	2.92mm male R/A for SS402 cable
PN:	400CC004001L
VSWR:	DC-40GHz . . . 1.35:1 (max)

Remark

- 1、 All physical dimensions are in mm and the tolerance is $\pm 1\%$
- 2、 The network analyzer tests in the whole frequency band, 100% electrical performance test.
- 3、 Special connectors and special attenuation can be customized according to customer requirements

Shenzhen RFcoms Technology Co.,LTD

Website: www.rfcoms.com

Tell: +86 13480725660

Email: luke@rfcoms.com

The rights of technical information provided on this sheet belongs to RFcoms. Contents cannot be distributed to other third-party companies without permission. The specifications are subjected to change without prior notice